


Deep Vein Thrombosis

- Deep Vein thrombosis (DVT) occurs when a **blood clot** forms in the deep veins¹
- DVT impacts pre-operative, post-operative, and bed-ridden patients that suffer from a **lack of movement/poor circulation**
- If untreated, clots can break apart, resulting in a **pulmonary embolism** (PE)
- Existing sequential compression devices (SCDs) **lack compression strength**, are **heavy**, and **restrict patient mobility**

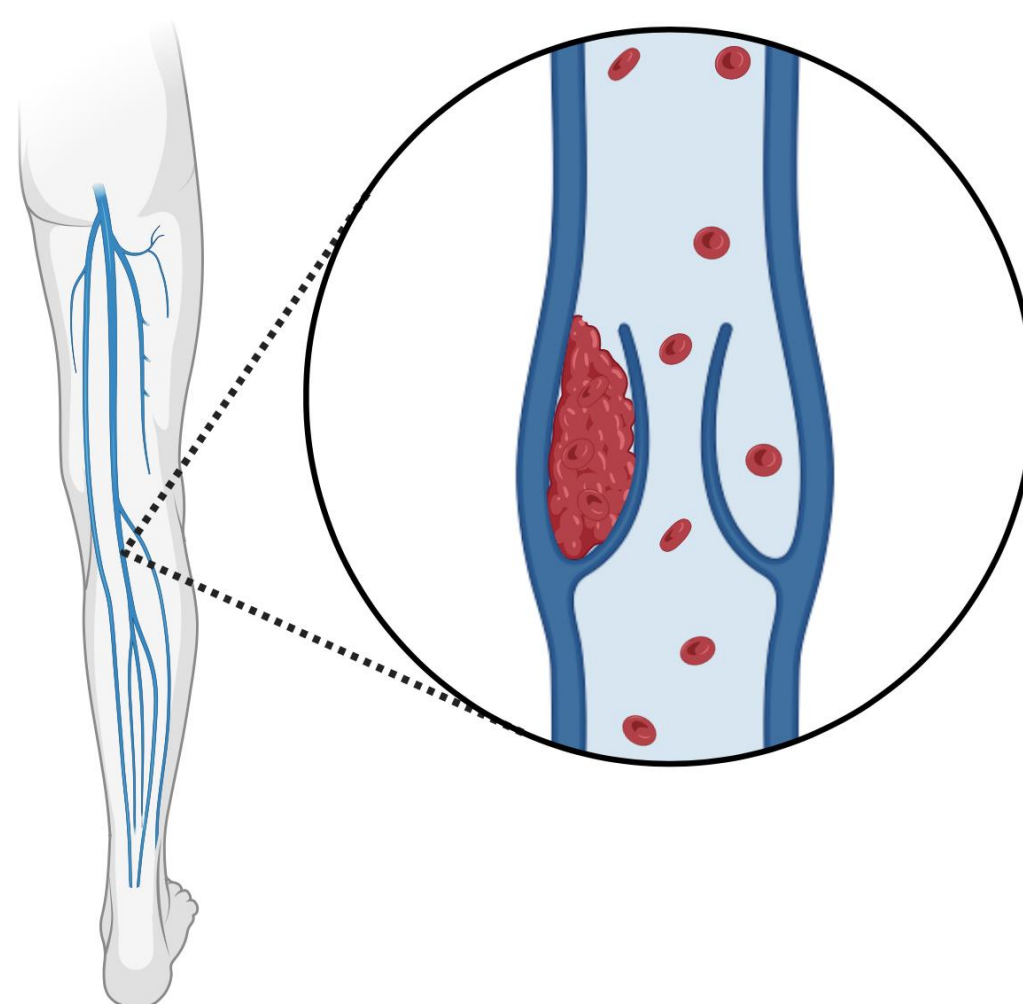

Design Specifications

The device shall:

- Have pressure reading of **80 mmHg**
- Be breathable, non irritable, and adjustable
- Weigh **< 5 lbs**
- Have **replaceable batteries**
- Permit **ankle movements** and patient **mobility**

The device should:

- Switch between **80 and 120 mmHg**
- Have a battery life of **6-8 hours**
- Have an **accessible** internal sleeve
- Fit a **large range** of calf sizes/lengths

Hardware

ESP32 Feather Microcontroller

Need a **centralized, efficient**, yet **small** microcontroller which can handle many inputs and outputs


- The ESP32 Feather is a relatively **small** microcontroller that can be implementable to a PCB²
- It features a dual-core processor



Power Design

Need an easily **accessible, rechargeable, lithium** battery that can last at least 3+ hours while not being **too heavy**

- Integrated 3 9V 600mAh Li battery for appropriate **power rating**, and **lightest** solution
- Implemented a HW-131 MB102 Power Supply Module (**step down convertor**) which takes in 9V input and outputs a stable 5V and 3.3V which is necessary to power the rest of the components

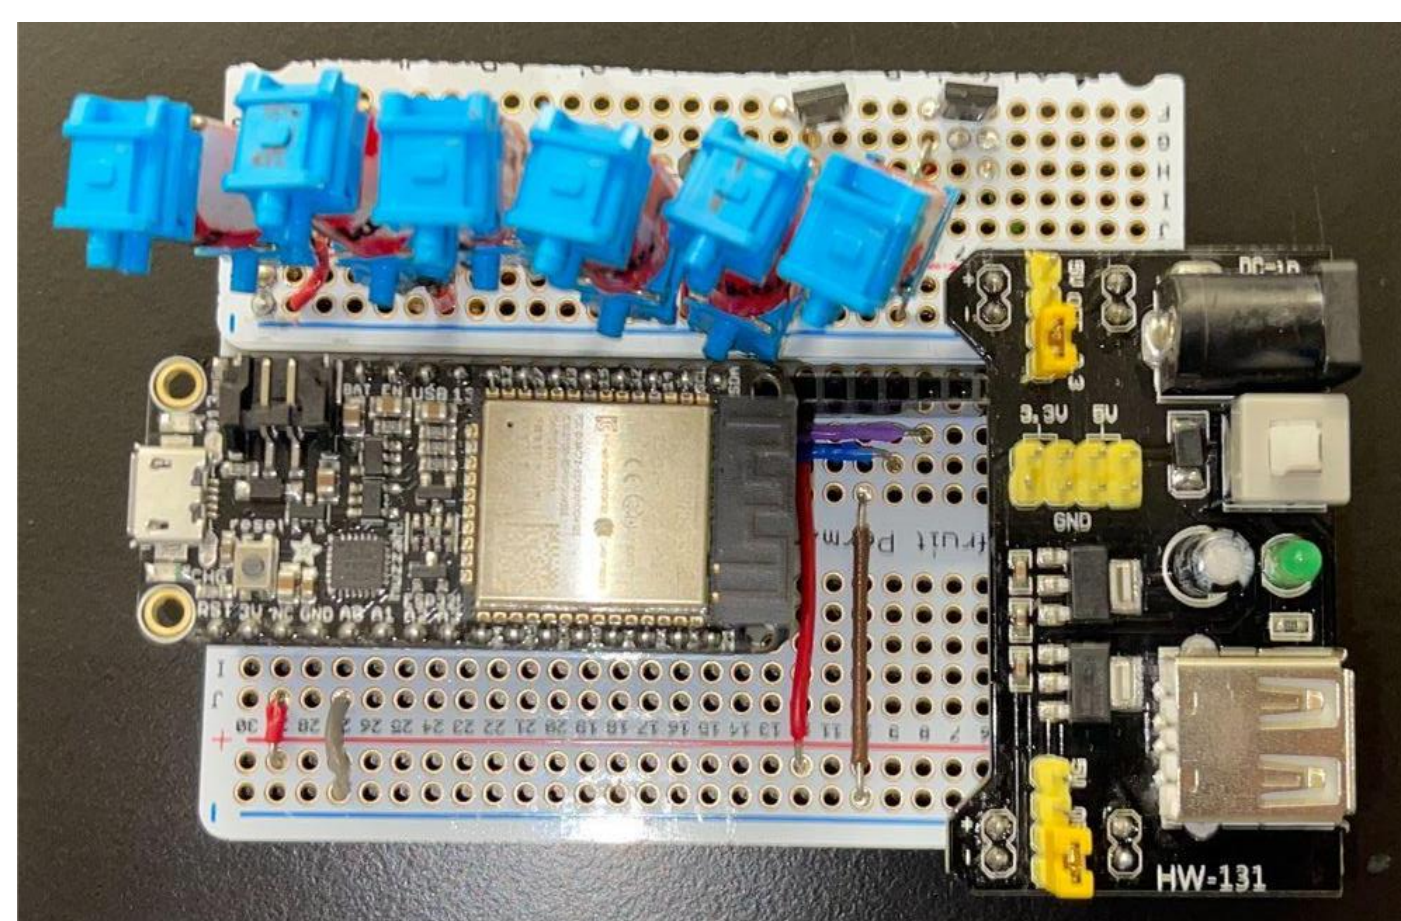

Inflation Sequencing & Design


Problem: Inflation and deflation in the initial prototype operated **too slowly**, potentially allowing backflow of blood

Inflation Mechanism:

- Sequential ascending inflation** of compression bladders (distal to proximal)
- Airflow to/from bladders **regulated** by **pump-sensor-valve** system


Compression Bladder Fabrication:

- Decreased number of compression **bladders** from **8 → 6**
 - Reduced total weight: smaller manifold and fewer valves
- Physically** and **chemically** bonded vinyl to form airtight bladders and integrate silicone tubing
 - Inner seal: epoxy (chemical)
 - Outer seal: heat seal and heat shrink tape (physical)

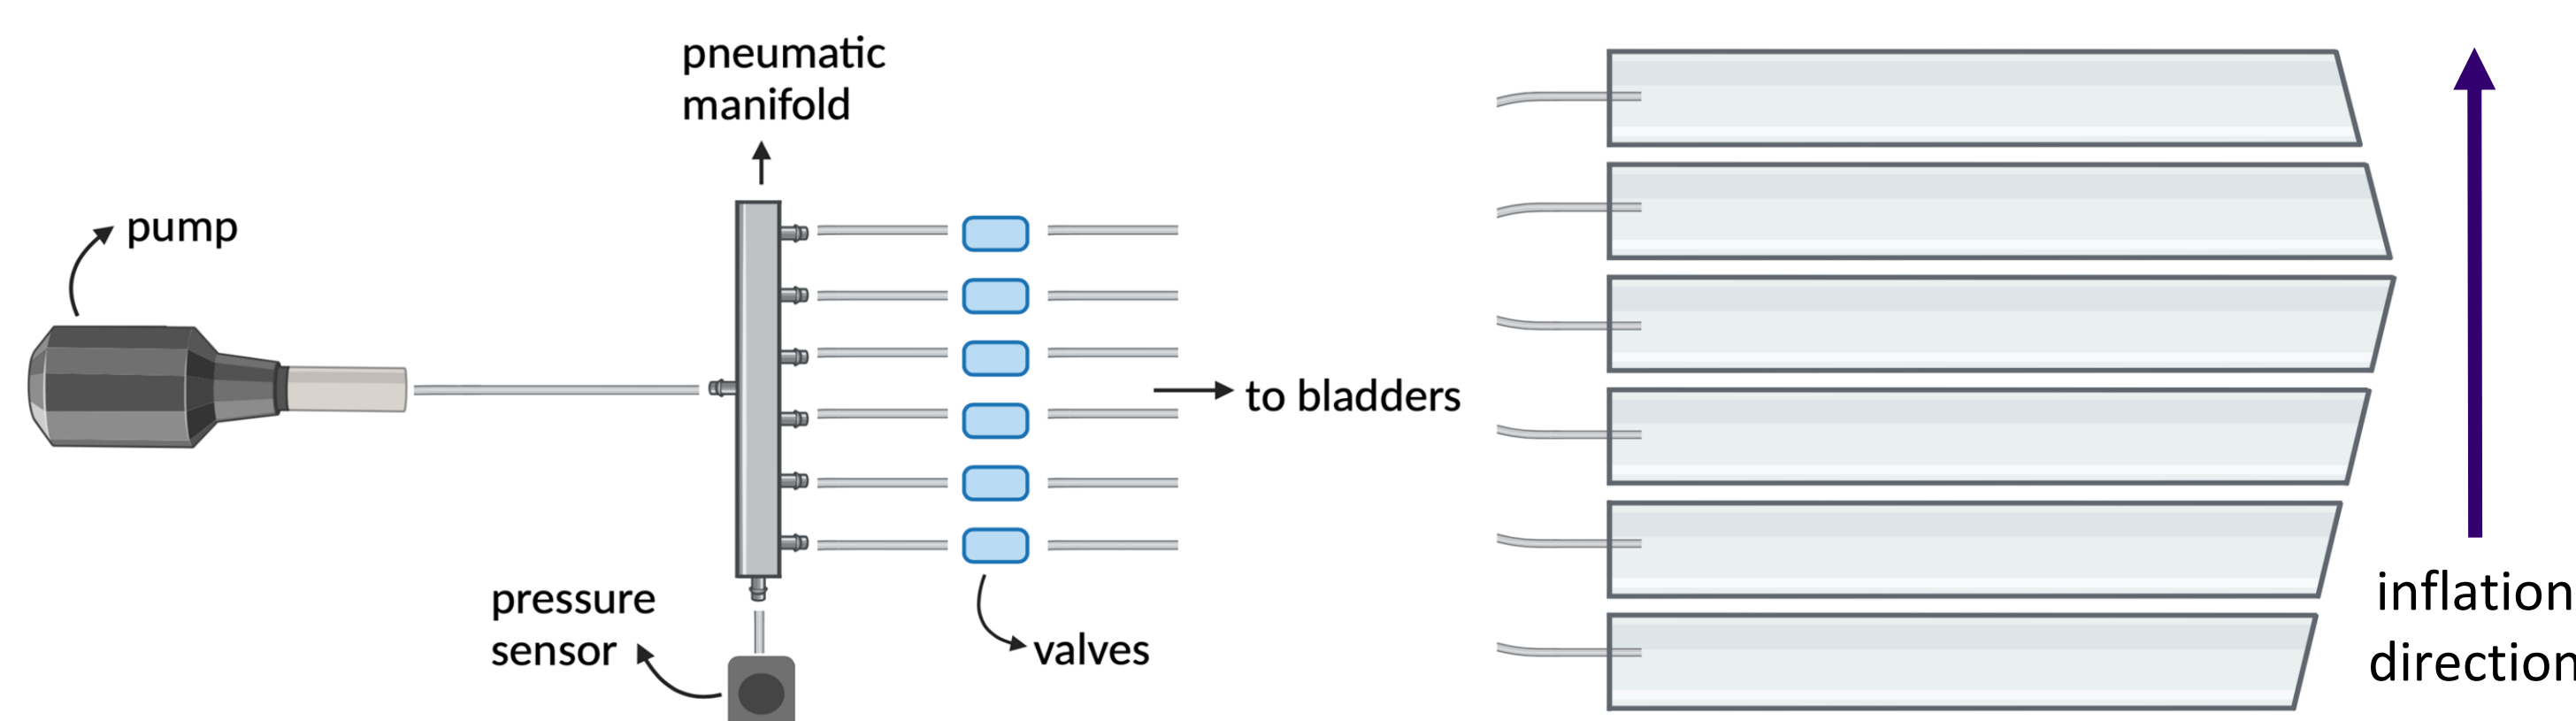

Firmware


Timing with inflation/deflation needs to be **consistent** to reach target pressures, ensuring only 5 seconds to complete an inflation cycle

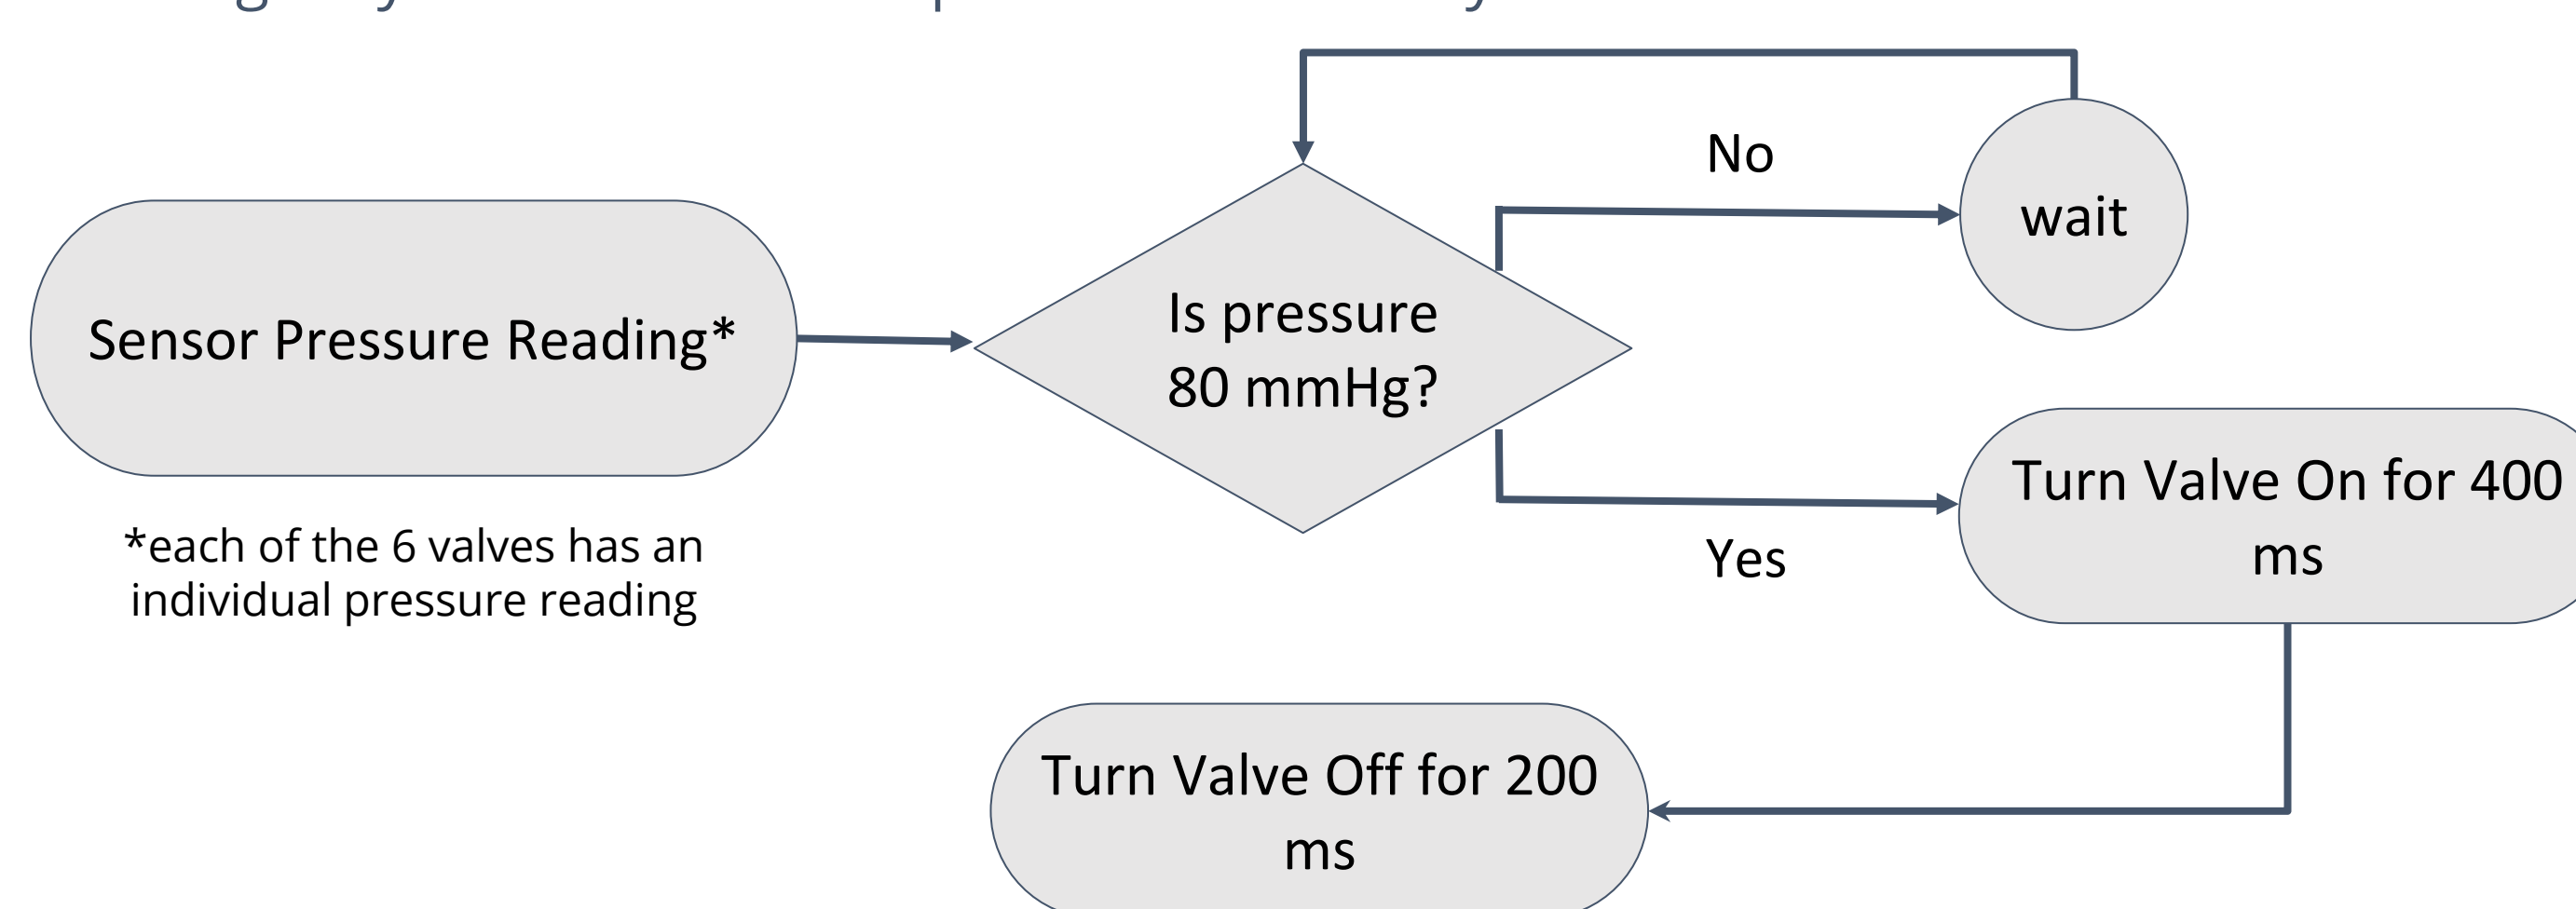

Motor and Valves

Valves need to **withstand a high flow rate** and **high pressure**³

- 3-way** universal valve

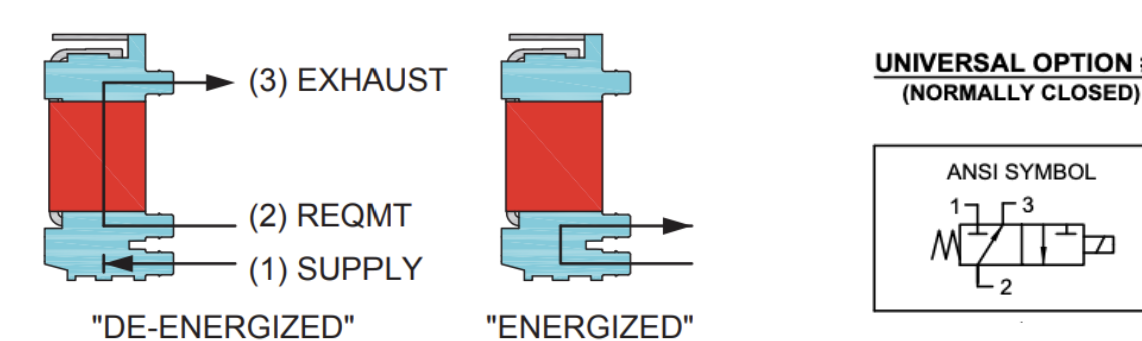

- These valves have power consumptions of **0.5 Watts** with **5 V** input
- Supplying valve with motor with **3 L/M** flow rate



Sleeve Design

Problem: The sleeve of the initial prototype used materials that were **too heavy** and **lacked breathability**

Material Selection:

Outer sleeve:
felt & nylon to prioritize **user comfort**

Compression bladders:
clear vinyl to improve **durability**


Pneumatic Manifold:
lightweight plastic tube splitter to decrease **device weight**

Enclosure:
PLA filament for easy **manufacturing** and lightweight **protection**



Additional Features:

- Optimized shape of sleeve to **better fit** shape of lower leg
- Velcro attachments and closures: allows for **access** and **adjustment** of components
- Internal elastic supports: holds compression bladders in place to ensure **proper positioning** within the sleeve

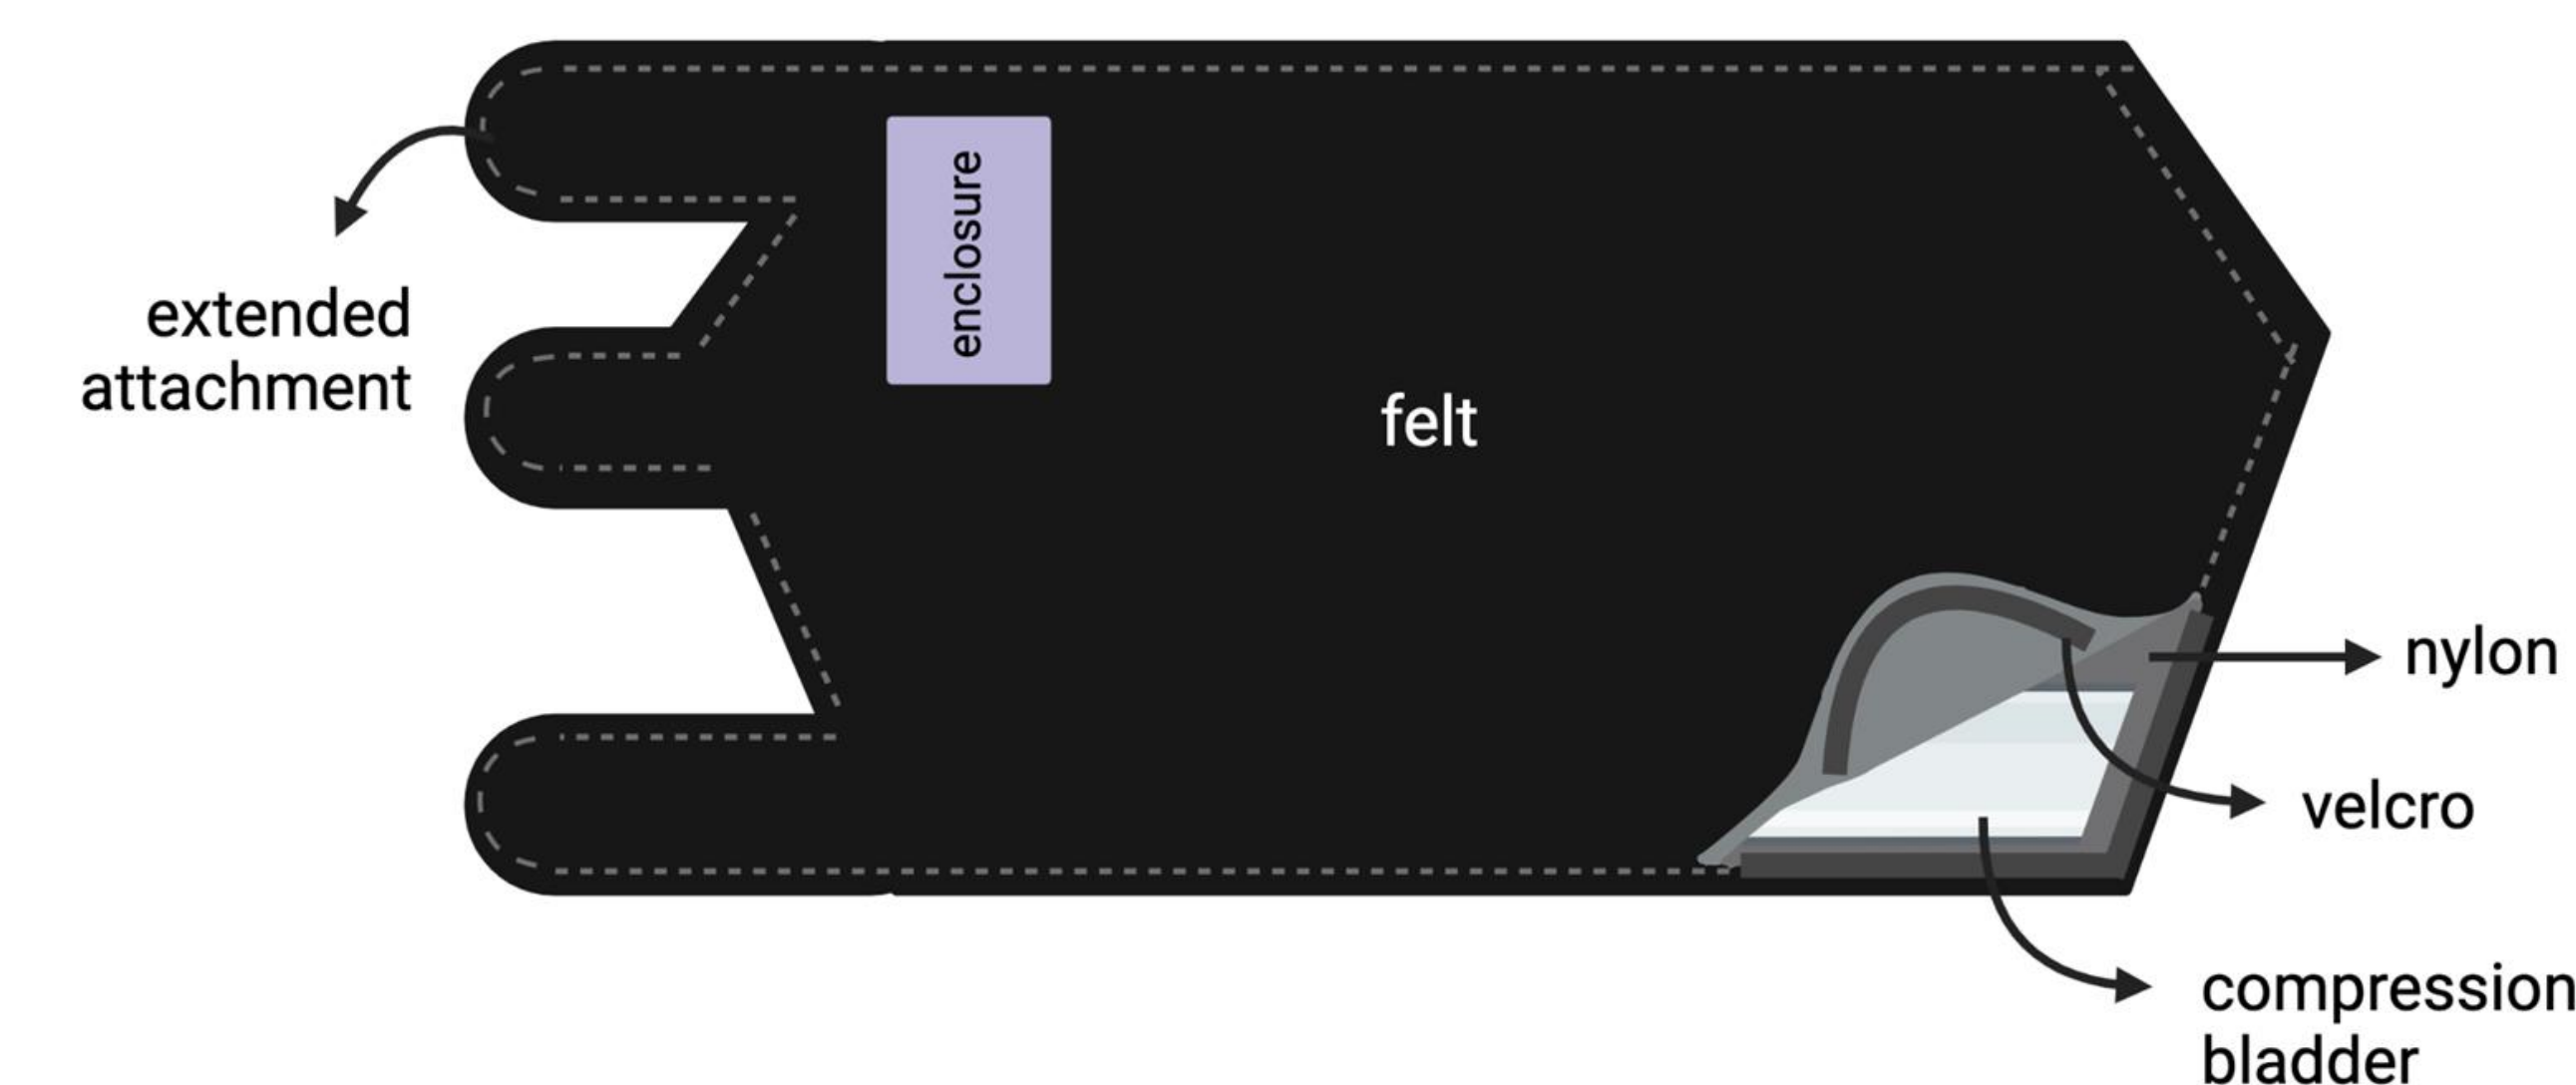

Results & Future Work

Results:

- Designed **6-bladder** SCD, with **80 mmHg** pressure settings
- One inflation cycle completes in **5 seconds**
- Device is **portable**, allowing for patient mobility
- Device allows for calf size up to **21"** **circumference**
- Battery life of **9 hours**

Future Work:

- Recycle air between compression bladders to **reduce power consumption**
- Create a **monitor** to display pressure applied
- Design **attachment extenders** to accommodate for a wider range of limb sizes
- Write a **user manual**

References & Acknowledgments

- [1] Penn Medicine - Deep Vein Thrombosis
[2] AdaFruit - ESP32 Feather Microcontroller
[3] Parker - Miniature Solenoid Valves

Thank you to: Dr. Chris Neills, Dr. Rupak Rajachar, Matthew Van Ginneken, Atharva Mattam, and Trevor Leen